
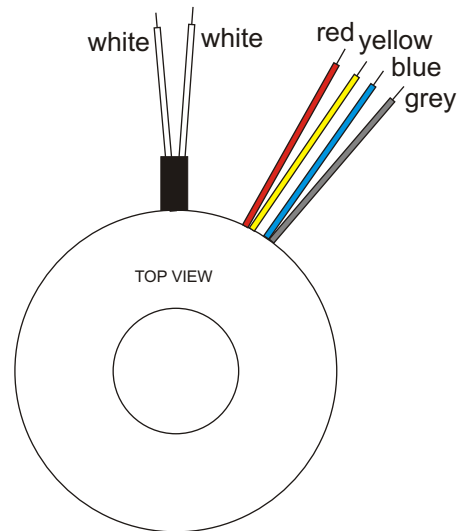
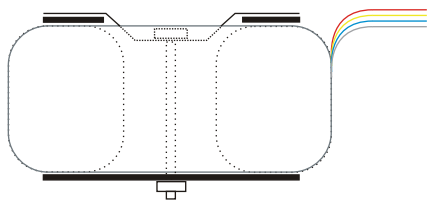
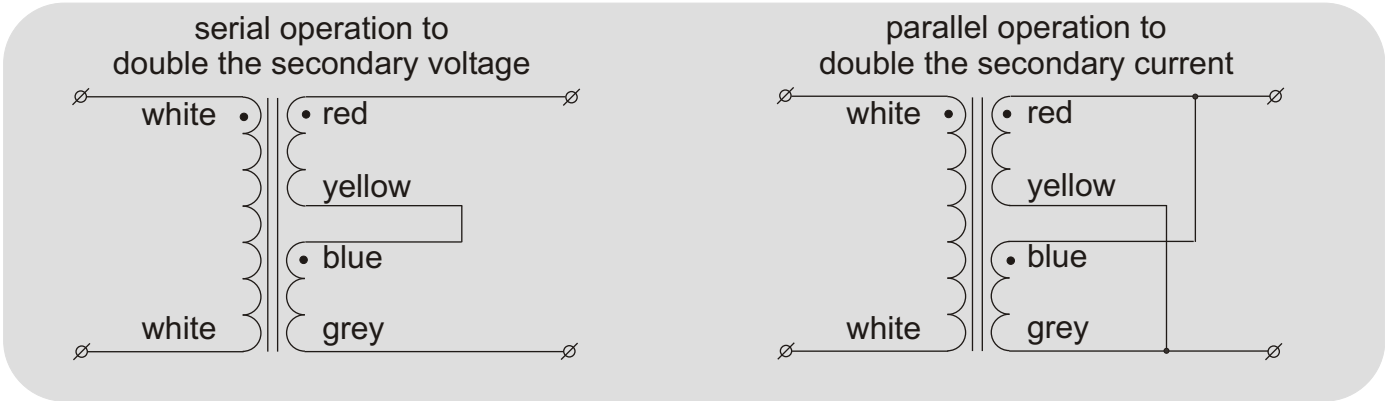


Toroidal transformer type 18011

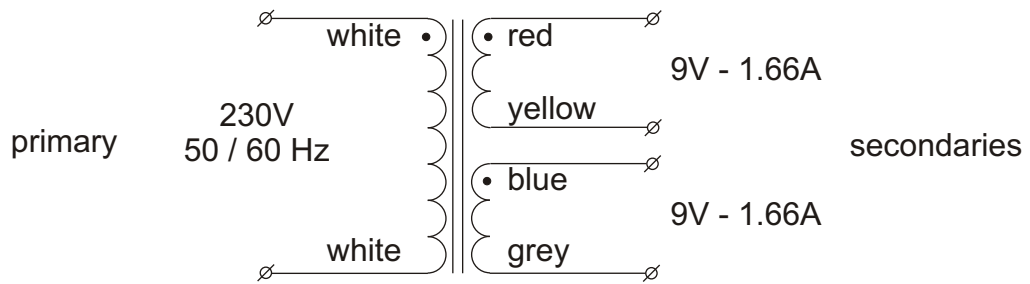

Power rating 30VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 9V - 1.66A
Regulation 17%


Diameter 70mm
Height 32mm
Weight 0.44kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø50mm
 2 neoprene washers Ø50mm
 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.16A, 5x20mm, IEC127, high I²t value
 Secondary: none



	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	18011
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457			
	info@amplimo.nl http://www.amplimo.nl	©	Copyright Amplimo BV	