






## Toroidal transformer type 28021

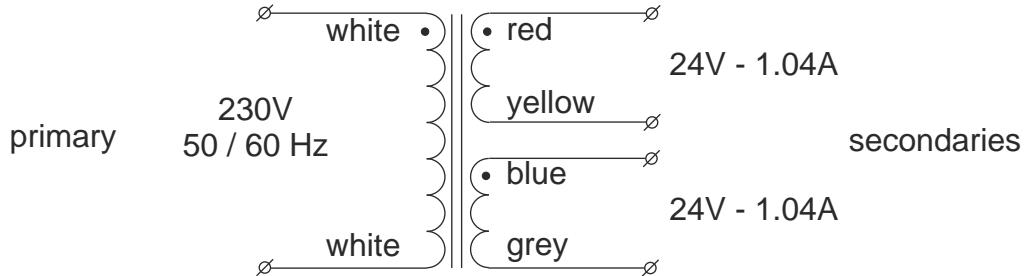

serial operation to double the secondary voltage

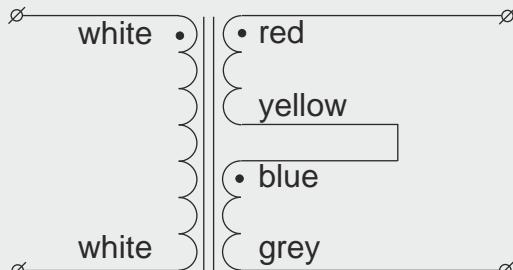

parallel operation to double the secondary current

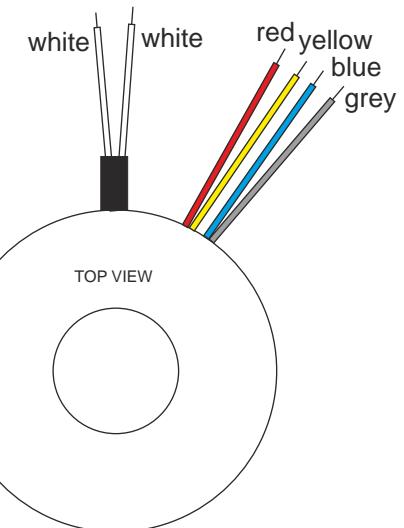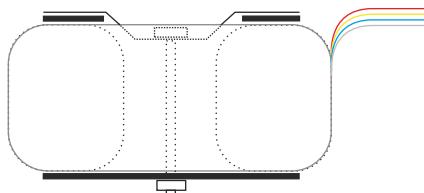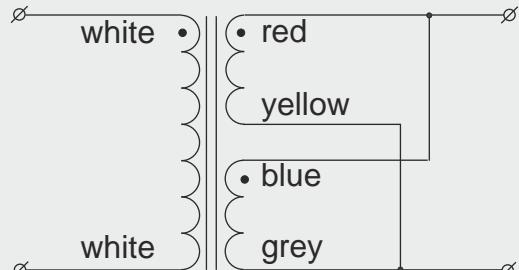

Power rating 50VA  
Primary voltage 230VAC - 50/60Hz  
Secondary voltages 2x 24V - 1.04A  
Regulation 12%

Diameter 80mm  
Height 39mm  
Weight 0.74kg  
Height and weight are measured without mounting materials  
All leads are solid and approx 200mm long

Supplied mounting materials:  
1 metal washer Ø70mm  
2 neoprene washers Ø70mm  
1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
Primary: 0.25A, 5x20mm, IEC127, high  $I^2t$  value  
Secondary: none



Industrieweg 14  
NL-7161 BX NEEDE  
The Netherlands  
P O - B o x 2 7  
NL-7160 AA NEEDE  
The Netherlands  
Tel.+31 (0)545 28 3456  
Fax+31 (0)545 28 3457  
[info@amplimo.nl](mailto:info@amplimo.nl)  
<http://www.amplimo.nl>

HB

Dec 2013

28021

toroidal transformer  
50VA