
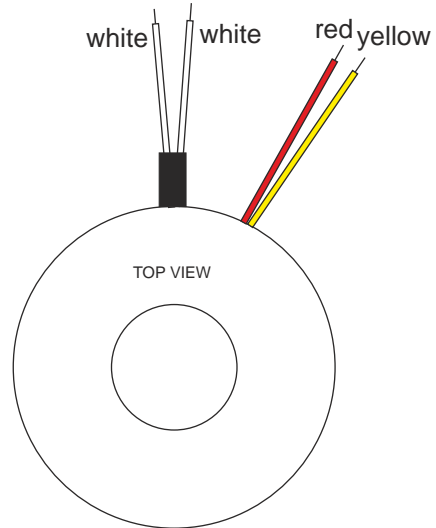
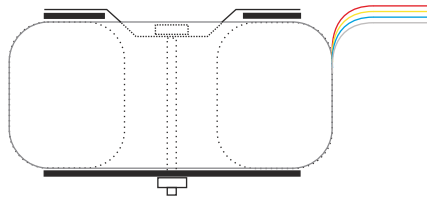


# Toroidal transformer type 2N102

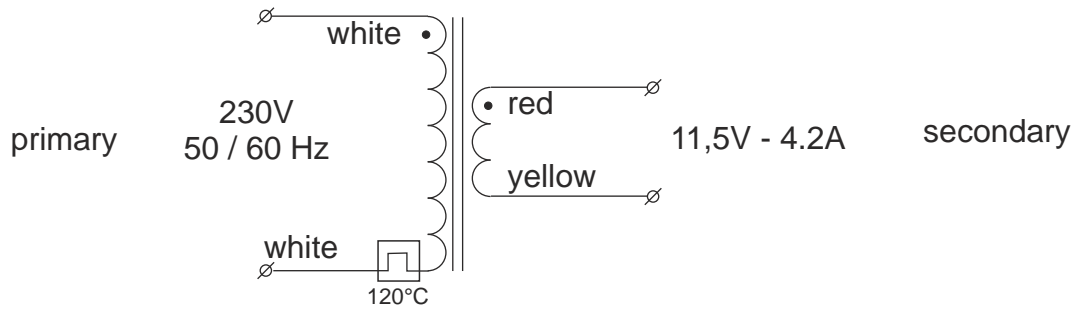

Power rating 50VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 11.5V - 4.2A  
 Built-in selfresetting thermal cutout 120°C  
 Regulation 12%

Diameter 80mm  
 Height 39mm  
 Weight 0.74kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø70mm  
 2 neoprene washers Ø70mm  
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary: 0.25A, 5x20mm, IEC127, high I<sup>2</sup>t value  
 Secondary: none



	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Sep 2013	<b>2N102</b>  toroidal transformer 50VA
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457			
	info@amplimo.nl <a href="http://www.amplimo.nl">http://www.amplimo.nl</a>			
	© Copyright Amplimo BV			