






Toroidal transformer type 38016

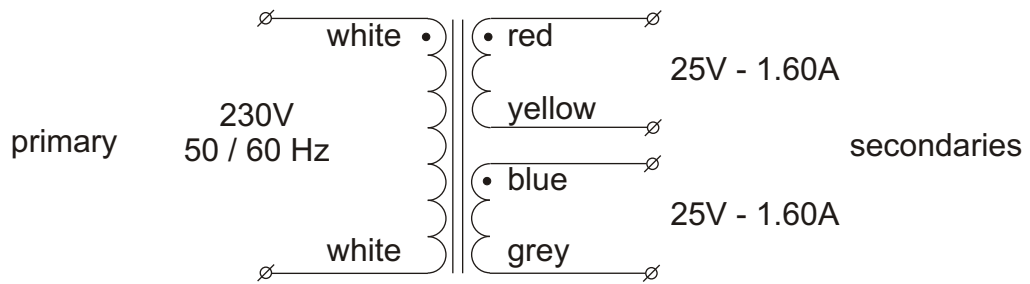

serial operation to
double the secondary voltage

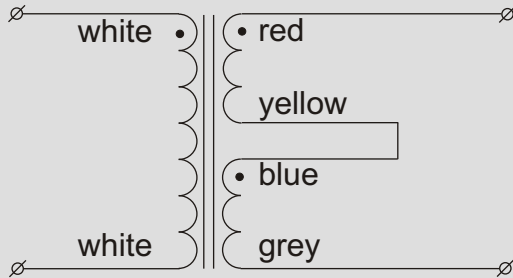

parallel operation to
double the secondary current

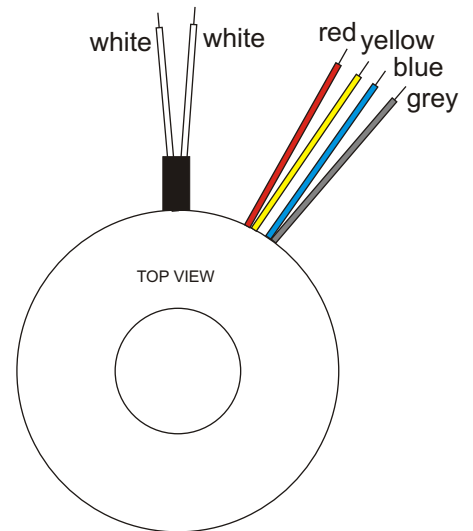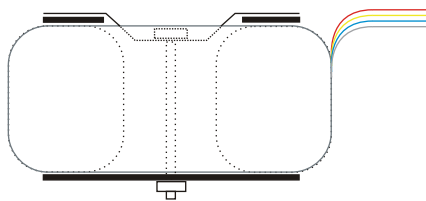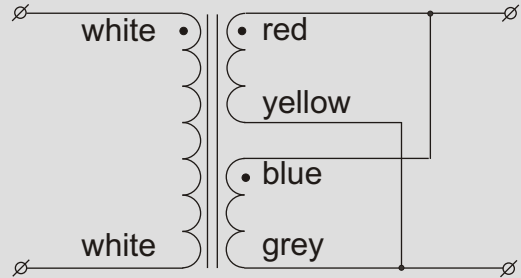

Power rating 80VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 25V - 1.60A
 Regulation 10%

Diameter 91mm
 Height 35mm
 Weight 0.90kg

Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø70mm
 2 neoprene washers Ø70mm
 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.4A, 5x20mm, IEC127, high I²t value
 Secondary: none



	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	<h1 style="margin: 0;">38016</h1> <p style="margin: 0;">toroidal transformer 80VA</p>	
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457				
	info@amplimo.nl http://www.amplimo.nl				
	© Copyright Amplimo BV				