
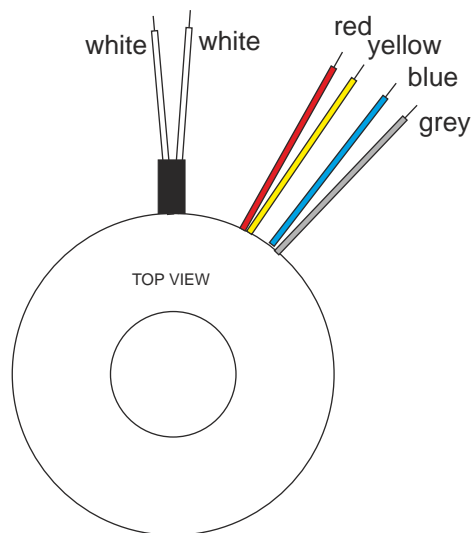
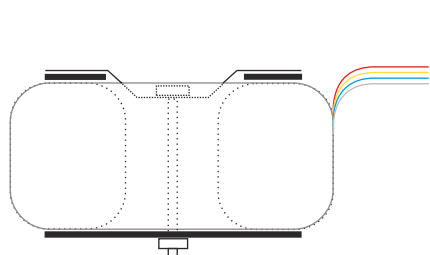


Toroidal transformer type 4N104

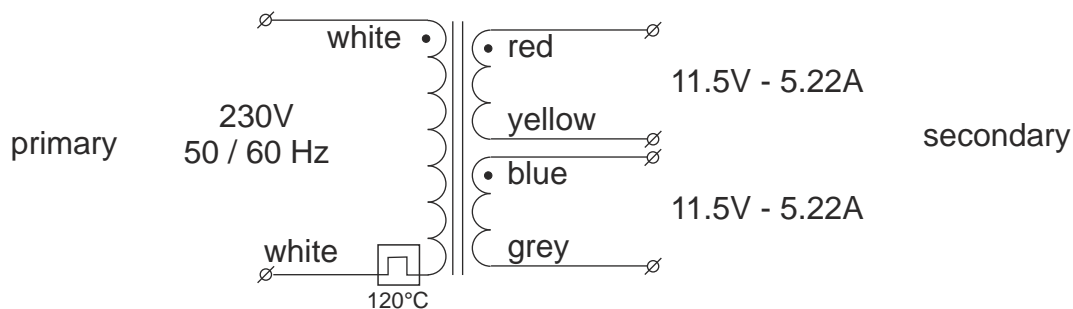


Power rating 50VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 11.5V - 5.22A
 Built-in selfresetting thermal cutout 120°C
 Regulation 8%

Diameter 92mm
 Height 52mm
 Weight 1.4kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø70mm
 2 neoprene washers Ø70mm
 1 bolt M5x55mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.63A, 5x20mm, IEC127, high I²t value
 Secondary: none

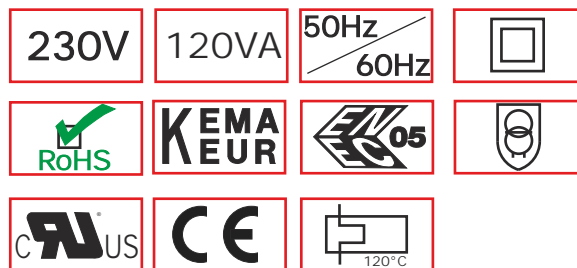

Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

info@amplimo.nl
<http://www.amplimo.nl>

HB Sep 2013

© Copyright Amplimo BV

4N104
 toroidal transformer
 120VA