






Toroidal transformer type 78057

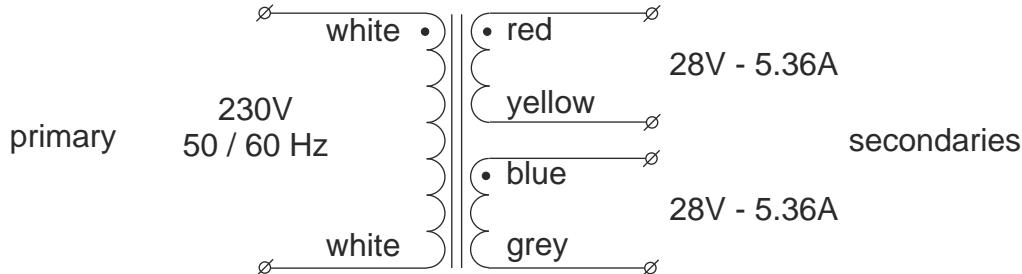

serial operation to double the secondary voltage

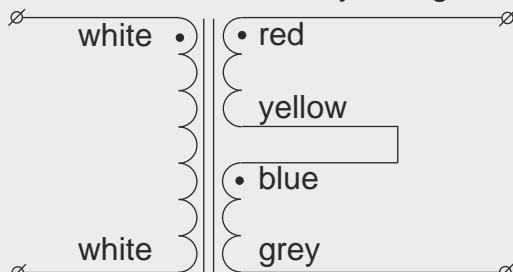

parallel operation to double the secondary current

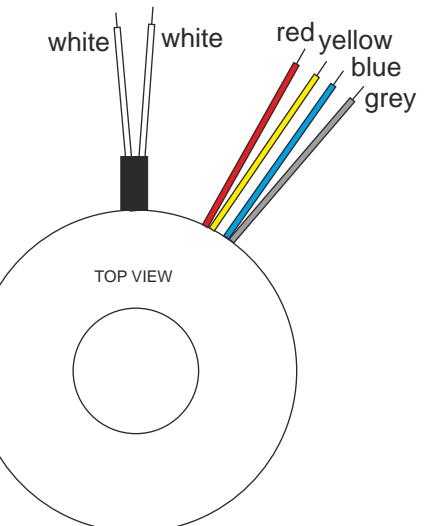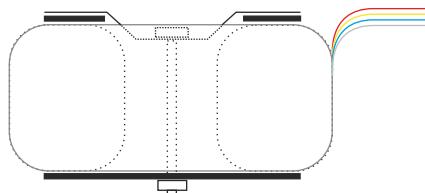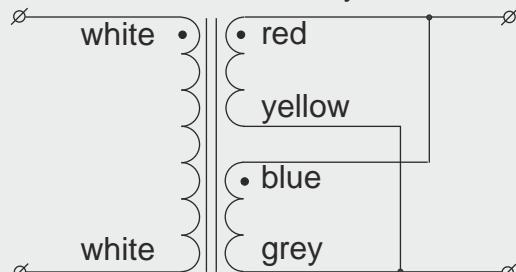

Power rating	300VA
Primary voltage	230VAC - 50/60Hz
Secondary voltages	2x 28V - 5.36A
Regulation	5%
Diameter	121mm
Height	56mm
Weight	2.9kg
Height and weight are measured without mounting materials	
All leads are solid and approx 200mm long	

Supplied mounting materials:

- 1 metal washer Ø90mm
- 2 neoprene washers Ø90mm
- 1 bolt M5x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
Primary: 1.6A, 5x20mm, IEC127, high I^2t value
Secondary: none



Industrieweg 14
NL-7161 BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl

HB

Dec 2011

78057

toroidal transformer
300VA