
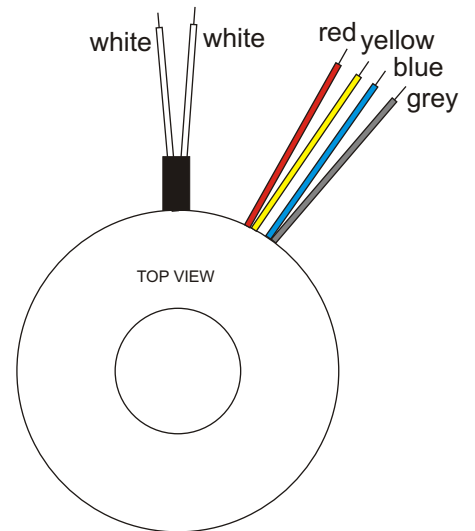
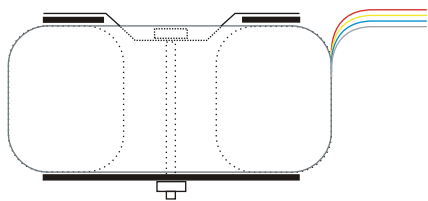
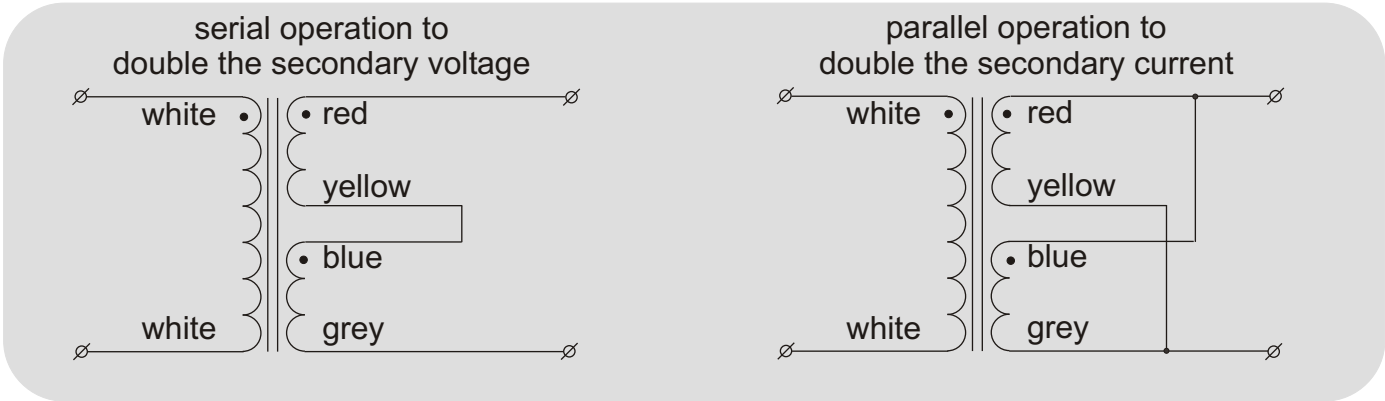


# Toroidal transformer type 88019

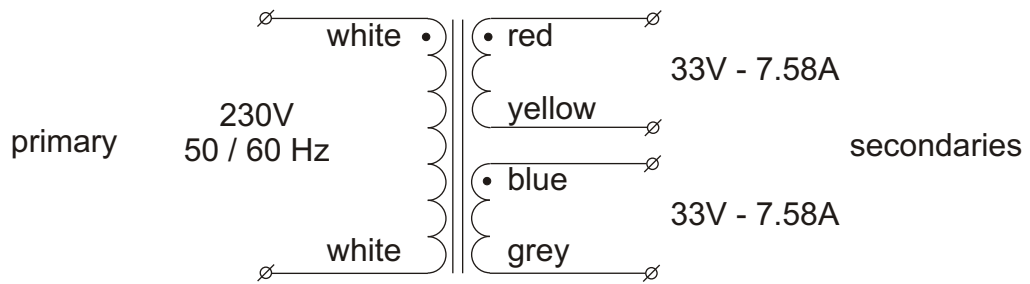


**Power rating** 500VA  
**Primary voltage** 230VAC - 50/60Hz  
**Secondary voltages** 2x 33V - 7.58A  
**Regulation** 4.5%  
**Diameter** 135mm  
**Height** 63mm  
**Weight** 4.2kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

**Supplied mounting materials:**  
 1 metal washer Ø110mm  
 2 neoprene washers Ø110mm  
 1 bolt M8x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary: 2.5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with two NTC resistors type NTC5.  
 Secondary: none



	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	<b>88019</b>  <b>toroidal transformer</b> <b>500VA</b>	
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457				
	info@amplimo.nl http://www.amplimo.nl	©	Copyright Amplimo BV		